

ODYSSEY

IVC

Intelligent Voltage Compensator

From 160kVA
to 4000kVA

IGBT static switches

Double conversion
technology

Very fast response

Output voltage
accuracy $\pm 0.5\%$





Standard features

Voltage regulation	IGBT control (double conversion technology)
Voltage stabilisation	Independent phase control
Selectable output voltage*	220-230-240V (L-N) / 380-400-415V (440-460-480V**) (L-L)
Rating	from 160kVA to 4000kVA
Input voltage variation range	±15% / -50%***
Frequency	50-60Hz ±5%
Admitted load variation	Up to 100%
Output voltage accuracy	±0.5%
Correction time	1/4 cycle
Cooling	Forced ventilation
Ambient temperature	-20/+40°C
Storage temperature	-25/+60°C
Max relative humidity	95%
Admitted overload	150% for 1 minute
Harmonic distortion	None introduced
Colour	RAL 9005
Protection degree	IP21
Instrumentation	Digital display (10")
Installation	Indoor
Communication system	MODBUS
Overvoltage protection	<ul style="list-style-type: none"> - Input class I surge arrestor - Output class II surge arrestor
Protection	<ul style="list-style-type: none"> - Input automatic circuit breaker - Automatic by-pass protection - Short circuit output protection
Accessories	<ul style="list-style-type: none"> - Isolating transformer - Manual maintenance by-pass - EMI/RFI filters

* The output voltage can be adjusted by choosing **one** of the indicated values. Such choice sets the new nominal value as a reference for all the stabiliser parameters.

** 60Hz only.

*** For 1 minute.

All ORTEA stabilisers are designed and built in compliance with the Low Voltage and Electromagnetic Compatibility European Directives with regard to the CE marking requirements. ORTEA products are built with suitable quality components and that the manufacturing process is constantly verified in accordance with the Quality Control Plans which the Company applies in compliance with the ISO 9001:2008 Standards. The commitment towards environmental issues and safety at work matters is guaranteed by the certification of the Management System according to the ISO14001:2004 and OHSAS18001:2007 Standards. In order to obtain better performance, the products described in the present document can be altered by the Company at any date and without prior notice. Technical data and descriptions do hold therefore any contractual value.



The **static stabiliser** is used when the **correction speed** represents the critical issue (for example, computers, laboratory equipment, measuring benches, medical instrumentation, bottling industry, laser/water cutting industry, automation industry, ecc.).

The operating principle is similar to the electro-mechanical stabilisers. The difference lies in the fact that the **voltage compensation** on the buck/boost primary winding is performed by an electronic board through **IGBT static switches** instead of the autotransformer with variable transformer ratio. The **microprocessor**-based system monitors the output voltage and determines the opening/closing of the IGBT switch ensuring the best regulation. Thanks to the use of the **double conversion technology** and the aid of electrolytic capacitors, high ratings can be achieved.

The voltage stabiliser can operate with **input and output voltage different** from the rated voltage. Such setting can be performed at the factory or at the Customer's premises according to the instructions given in the handbook. The stabiliser operates with a **load variation range** for each phase **from 0 to 100%** and **is not affected by the power factor of the load**.



The standard cabinet is an IP21 metal enclosure with RAL9005 finish for indoor installation.

The **Odyssey** series is provided with a 10" digital display showing data and setting parameters.

It is also possible to communicate with the stabiliser with the **Modbus** protocol (standard communication protocol between electronic industrial equipment) via an Ethernet connection with RJ45 cable.

The stabilisers are designed and built in compliance with the European Directives concerning **CE marking** (Low Voltage Directive and Electromagnetic Compatibility Directive).

UL certification in progress.

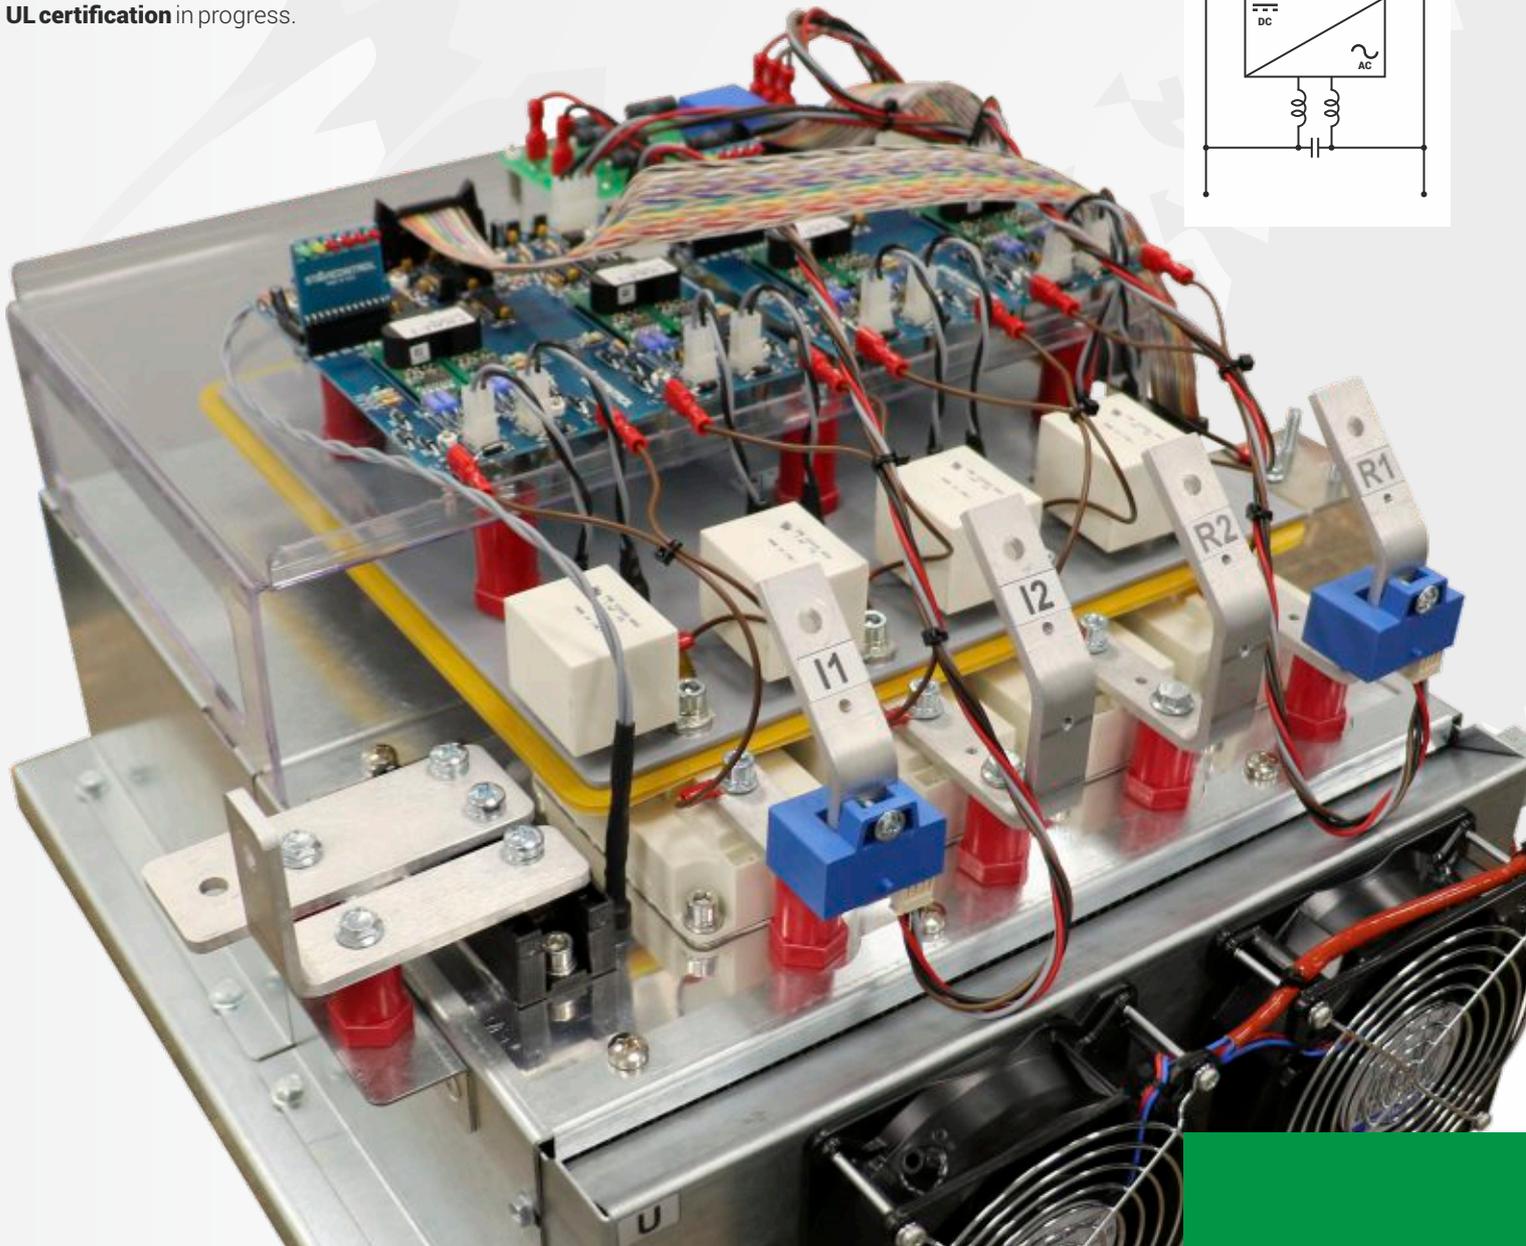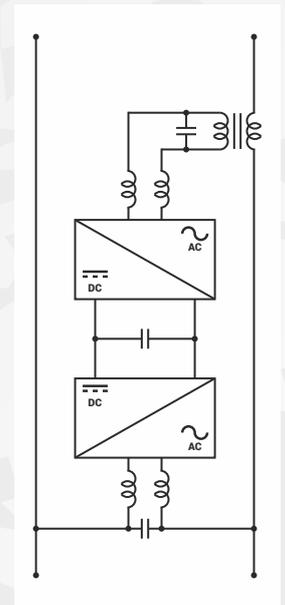

The present document is reserved property of ORTEA SpA:

it is compulsory to inform head office and ask for authorisation before proceeding with any release or reproduction. ORTEA SpA will not be held liable or responsible in any way for unauthorised copies, alterations or additions to the text or to the illustrated parts of this document. Any modification involving company logo, certification symbols, names and official data is strictly forbidden.

In order to obtain better performance, ORTEA SpA reserves also the right to alter the products described in this document at any date and without prior notice. Technical data and descriptions do not therefore have any contractual value.

-  **DIGITAL VOLTAGE STABILISERS**
-  **POWER TRANSFORMERS**
-  **POWER FACTOR CORRECTION SYSTEMS**



-  **Experience**
-  **Reliability**
-  **Flexibility**
-  **Speed**
-  **Research & Development**
-  **Synergy**
-  **After-sales**
-  **Quality**



Via dei Chiosi, 21
 20873 Cavenago di Brianza MB - ITALY
 Phone: +39.02.95.917.800
 Fax: +39.02.95.917.801
 Mail: sales@ortea.com

